



Throttle Controller with Remote Control Auto-Cruise

3 drive · REMOTE

AUTO CRUISE & THROTTLE CONTROLLER



3DR ¥32,000



REMOTE AUTO CRUISE

Increased Handleability and Comfort



NEW

AUTO CRUISE Cruise automatically at set speed (30~140km/h).

REMOTE SWITCH Switch can be installed to the wiper lever, near the shift lever or any other easy to operate position using double-sided tape.



End of Wiper Lever

Use supplied Top Spacer for installing to a curved surface.



Side of Wiper Lever

Use supplied Lever Spacer for installing to a curved surface.




Near Shift Lever



Near Standard Switches

Remote Control


Use switch to remotely control all Auto Cruise operations.



Stable and Safe Remote Control

Utilizes newly designed more stable speed control system.

Basic Wiring

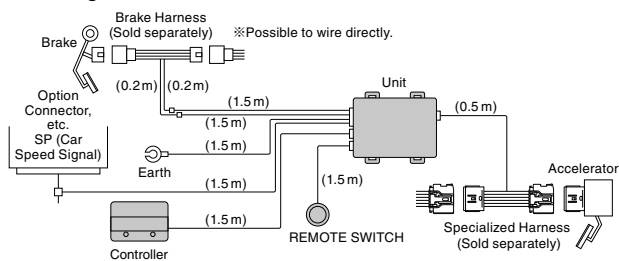

Size Controller: 50x34x14 (Depth) mm
Unit: 50x22x70 (Depth) mm

※Please check the List of Compatible Car Models. ※After installation, be sure to make initial settings. ※Only use a PIVOT brand specialized harness.

※Do not install in models that are not listed as compatible.

THROTTLE CONTROLLER

Throttle Controller with Response Mode



NEW


RESPONSE MODE NEW (5 Levels) Increased response to low and mid range acceleration to near that of wired characteristics.

SPORT MODE (7 Levels) Increased response across all ranges of acceleration is best for Sports driving.


ECO MODE (5 Levels) Reduced response to low and mid range acceleration for eco-driving.

NORMAL MODE Standard performance.

Comparison of Acceleration Time



Comparison of Fuel Consumption



rP5: MAX. RESPONSE MODE SP7: MAX. SPORTS MODE Ec5: MAX. ECO MODE

- HONDA STEP WAGON (RG1) / Running distance: 0-400 m / Degree of acceleration: 30%

Comparison of Fuel Consumption

WAGON R (MH23S) / Road grade: Upward slope of approx. 1.5 degrees / Running distance: 1.5 km



Actual results may vary depending upon the type of car and road conditions.
※Variable speed driving was obtained by accelerating up and down around the set speed.

Sold separately ※Check the List of Compatible Car Models for necessary parts.



Specialized Harness
Necessary.



Brake Harness
Not necessary if wiring directly.

MT Clutch Harness
Not necessary if wiring directly.

MT Clutch Adaptor
Deactivate Auto-Cruise from the clutch. (Only where necessary)

Speed Pulse Adapter
Prevent speed error for some models of MITSUBISHI, SUZUKI and NISSAN.